


## FTTx-Reflector 1625 nm

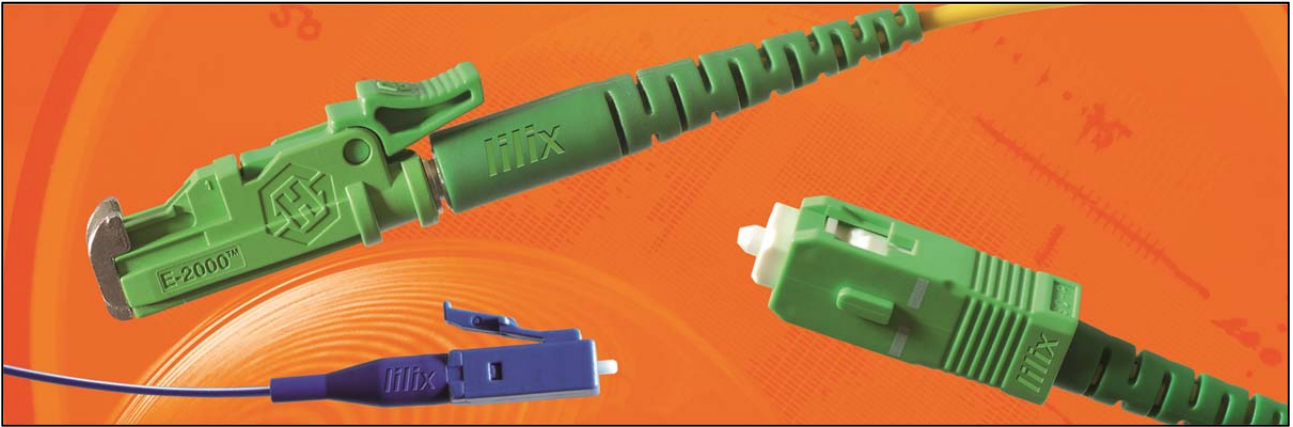

The lilix FTTx reflector for 1625 nm reflects all wavelengths from 1620 nm to 1700 nm. With its low insertion loss at the transmission wavelength range and high reflectance at the reflected wavelength range it is the ideal optical termination for link monitoring of FTTx networks via OTDR (optical time domain reflectometer) measurements at 1625 nm. FTTx reflectors are suitable for both point to point (PTP) and point to multipoint (PTMP) networks. They are preferably installed at the subscriber's homes in order to highlight these positions in the OTDR trace by distinct reflexions of the test signal.

### Features

- High and homogenous reflectivity over the whole reflected wavelength range
- Low insertion loss and high return loss over the whole transmission wavelength range
- High power resistance

### Applications

- Public and private fibre optic networks
- Termination of fibre optic lines

### Styles

- Terminating connector (only for SC, LC or LSH connector standard)
- Pigtail or patchcord with integrated reflector
- Attenuator style (only for SC standard)
- Tube style

### Optische Parameters

Parameter	Value		
	min.	typ.	max.
Transmission wavelength range [nm]	1260 - 1590		
Reflected wavelength range [nm]	1620 - 1700		
Insertion loss transmission wavelength range [dB] <sup>(1)</sup>			0,5
Reflectivity for reflected wavelength range [%]	90	95	
Return loss for transmission wavelength range [dB]		26	30
Polarisation Dependent Loss (PDL) [dB]			0,15
Power stability [mW]	300	500	
Working temperature range [°C] <sup>(2)</sup>	-25		85

(1) without connectors (2) depending from pigtail type and style